

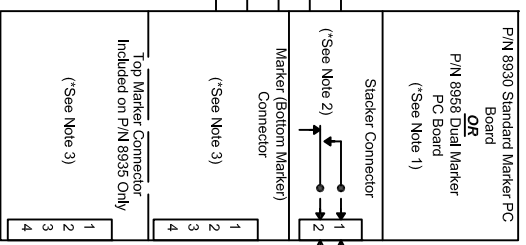


# Carpenter Model 36A, 42C, 93, 97A Wire Stacker Interface information

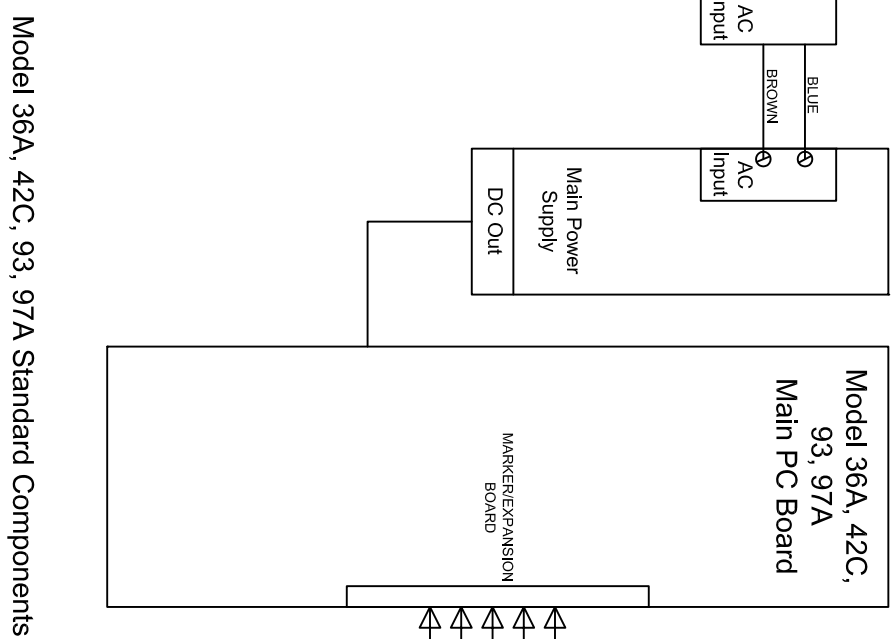

- Wire Stacker Interface Notes**
- 1) When interfacing **ONLY** a Wire Stacker accessory to a Carpenter machine, either marker board 8930 or 8958 can be used.
  - 2) Stacker output is a N.O. "Dry" Relay Contact, rated at 8A 250VAC/30VDC.
  - 3) When interfacing **only** a Wire Stacker accessory, the marker output(s) are available for future addition of a Wire Marker accessory. Contact the factory for additional information.
  - 4) Contact the Wire Stacker manufacturer for the correct Interface cable.

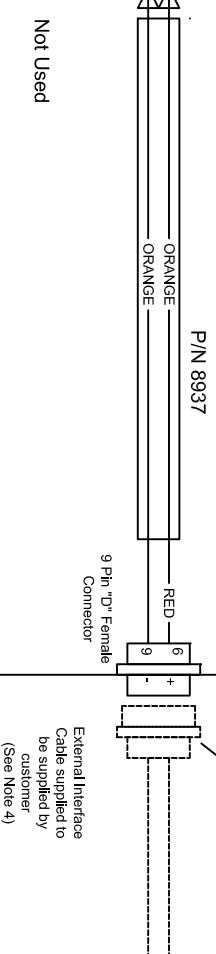

Model 36A, 42C, 93, 97A Standard Components

Model 36A, 42C, 93, 97A Optional (Internal) Components required for interfacing a Wire Stacker